

Stirling 70

DOWNLIGHT

Product Code

MD05



Technical Description

Classic and compact

- Also comes in Ø90mm cut-out version
- System lumen range from 750lm - 950lm
- Comes with IP40 protection
- Compact body with efficient optics
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	9.5W, 13.5W
Control Type	Non-Dimmable, Phase-Cut Dimmable, DALI Dimmable
System Efficacy (max.)	79lm/W

Photometric Info

Luminaire Lumens	750lm, 950lm
CRI	CRi90
CCT	2700K, 3000K, 4000K
Beam Angle	24°, 35°, 60°


Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	White, Black
Custom Dimming Type	Available on request
IP Rating / IK Rating	IP40




Polar Distribution Diagrams

Stirling 70 36°

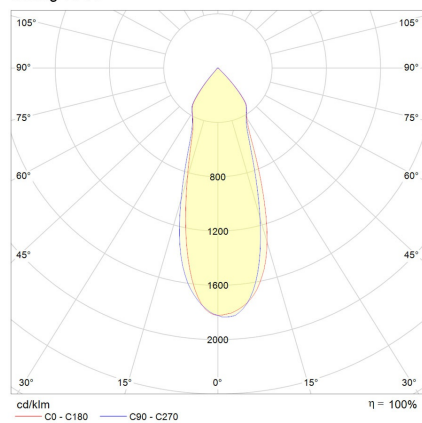

Stirling 70 24°

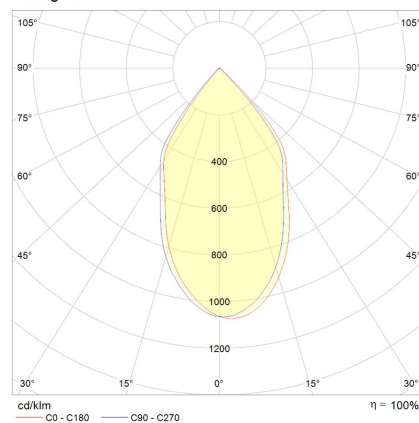

Stirling 70 59°

