



## Product Code

MS12



## Technical Description

## Reduce visual bulk with an in-track driver

- Experience the latest in spotlight innovation with a streamlined in-track driver design, allowing the Como spotlight to boast a compact and elegant form, significantly smaller than traditional track-mounted equivalents
- This advancement not only reduces visual bulk but also optimises thermal management, thereby extending the product's lifespan
- Featuring a cutting-edge optical system, the Como provides low-glare lighting with a gentle cut-off, offering a comprehensive range of beam angles up to 60°
- It is available with advanced control options, including DALI and Wireless (Casambi enabled) for seamless integration into modern lighting schemes
- If you require a customised version of this product, please [contact us](#)

## Electrical Specifications


System Power	13W, 20W, 29W
Input Voltage	240V
Control Type	ON/OFF, DALI
System Efficacy (max.)	100lm/W
Power Factor	> 0.9

## Physical Characteristics

Installation Method	3-Circuit In-Track Mounted
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Maximum Tilt Angle	90°


## Photometric Info

Luminaire Lumens	1250lm, 2000lm, 2430lm
CRI	CRi90
CCT	3000K, 4000K
Beam Angle	15°, 35°, 60°
MacAdam Step	3 Step

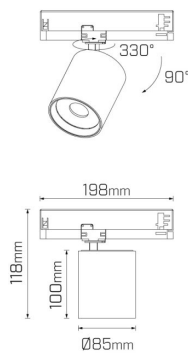


## Polar Distribution Diagrams

Como 30°

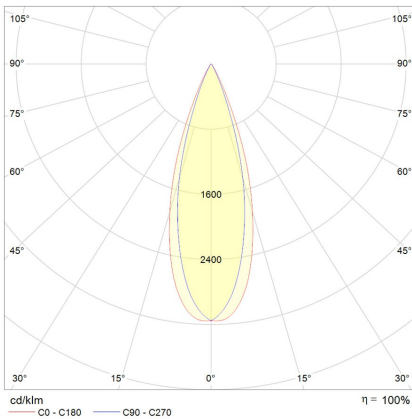

Como 60°

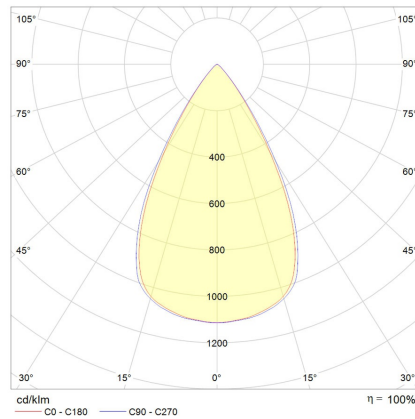

Como 20°

