

Product Code

MD52



Technical Description

Contoured execution

- Trim Ø142mm, cut-out Ø135mm
- Wide range of beamspreads: 15°, 24°, 38°, 55°
- Available in 13W, 19W, 28W, 36W
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	13W, 19W, 28W, 36W
Input Voltage	240V
Control Type	Non-Dimmable
System Efficacy (max.)	96lm/W

Photometric Info

Luminaire Lumens	1200lm, 2000lm, 1250lm, 850lm, 1750lm, 2400lm, 1650lm
CRI	CRI90
CCT	3000K, 3000K Vivid, 3500K, 3500K Vivid, 4000K, 4000K Vivid
Beam Angle	15°, 24°, 38°, 55°


Physical Characteristics

Installation Method	Adjustable Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Weight	1.2kgKgs
Diffuser	Clear



Polar Distribution Diagrams

Lecce 15°

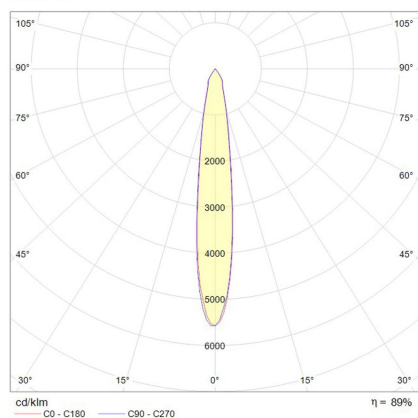

Lecce 24°

