


## Burano Tiny

DC LOW VOLTAGE

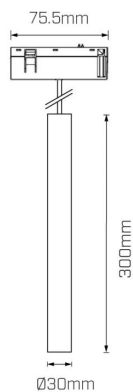

## Product Code

MV11



## Technical Description

## Sleek simplicity...

- Part of the Mondolux Pacto DC48V low-voltage range, with our signature Cross-Beam Lens technology for increased efficacy
- The smallest pendant of the Burano family, with in-track installation to reduce visual bulk and maintain clean lines
- Multiple beam angle options available of 29°, 36°, and 50°
- Modular 48V click-in system for flexibility and easy installation
- Also available in [Mini](#) size
- Non-dimmable and PWM DALI control options (Casambi Wireless Control available upon request)
- If you require a customised version of this product, please [contact us](#)

## Electrical Specifications

System Power	8W
Input Voltage	48V DC
Control Type	ON/OFF, DALI
System Efficacy (max.)	44lm/W

## Photometric Info


Luminaire Lumens	350lm
CRI	CRi90
CCT	3000K, 4000K
Beam Angle	29°, 36°, 50°

## Physical Characteristics


Installation Method	DC-Track Suspended
Trim Finish	White, Black
IP Rating / IK Rating	IP20
Fitting Material	Aluminium

## Polar Distribution Diagrams

Burano Tiny 36°

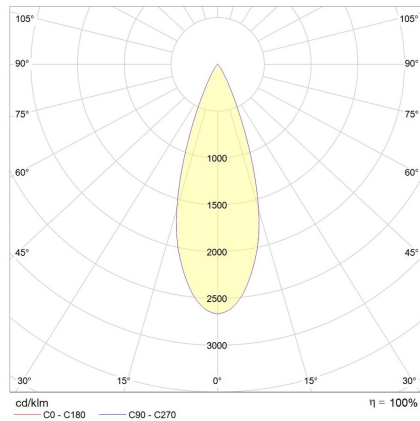

Burano Tiny 50°

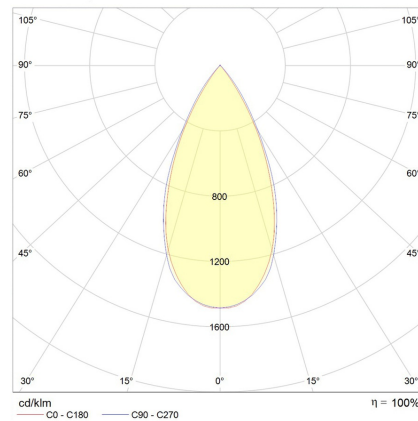

Burano Tiny 29°

