

Pisa Mini

DC LOW VOLTAGE



Product Code

MV35



Technical Description

The petite powerhouse...

- Part of the Mondolux Pacto DC48V low-voltage range, with our signature Cross-Beam Lens technology for increased efficacy
- The middle member of the Pisa family, with in-track installation to reduce visual bulk and maintain clean lines
- Multiple beam angle options available of 21°, 33°, and 42°
- Maximum tilt of 90° for excellent adjustability
- Configure with Honeycomb Louvre, Snoot, Oval Snoot, Line Diffuser or Frosted Diffuser accessories (available upon request) to further minimise glare, improve visual comfort and customise aesthetic appearance
- Modular 48V click-in system for flexibility and easy installation
- Also available in [Nano Duo](#), [Tiny Duo](#), [Tiny](#) and [Midi](#) sizes
- Non-dimmable and PWM DALI control options (Casambi Wireless Control available upon request)
- If you require a customised version of this product, please [contact us](#)

Electrical Specifications


System Power	14W
Input Voltage	48V DC
Control Type	ON/OFF, DALI
System Efficacy (max.)	59lm/W

Photometric Info

Luminaire Lumens	830lm
CRI	CRi90
CCT	3000K, 4000K
Beam Angle	21°, 33°, 42°
Lumen Maintenance	> 63, 200hrs (L70 B10)
MacAdam Step	3 Step


Physical Characteristics

Installation Method	DC-Track Recessed
Trim Finish	White, Black
IP Rating / IK Rating	IP20/IK05
Maximum Rotation Angle	90°
Fitting Material	Aluminium




Polar Distribution Diagrams

Pisa Mini 33°

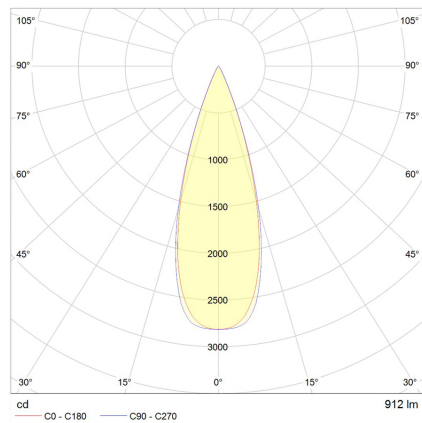

Pisa Mini 21°

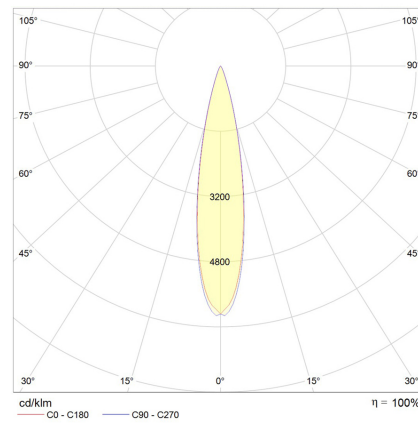

Pisa Mini 42°

