

Product Code

MO31



Technical Description

Outdoor highlighting with style...

- Outdoor spotlight designed for commercial outdoor use
- Highly efficient, robust performance
- Exceptional IP66 and IK06 ratings with CRI90 as standard and a 5-year warranty*
- Cross beam Gen-2 lens
- UV stabilised matte finish in black (Marine grade powdercoat and other finishes available on request)
- Also available in Maxi size with various mounting and glare control accessories
- Local stock availability

*Please see Warranty Terms & Conditions for further information.

Electrical Specifications

System Power	6W
Input Voltage	24V DC
Control Type	ON/OFF
System Efficacy	53lm/W

Physical Characteristics

Installation Method	Surface Mounted
Trim Finish	Black
IP Rating / IK Rating	IP66/ IK06
Accessories	Without Accessory
Weight	0.21Kgs


Photometric Info

Luminaire Lumens	315lm
Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K
Beam Angle	15°, 25°, 40°
Lumen Maintenance (L70)	> 52,000hrs (L70 B10)
MacAdam Step	3 Step


Maximum Tilt Angle	90°
Maximum Rotation Angle	170°

Polar Distribution Diagrams

Thomas Mini 15°

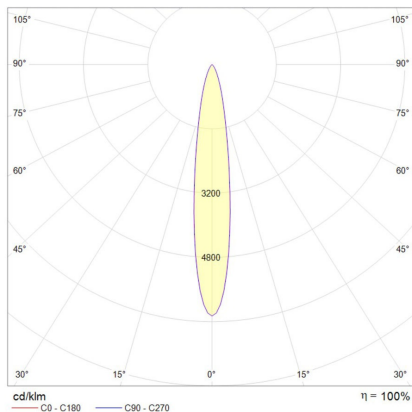

Thomas Mini 25°

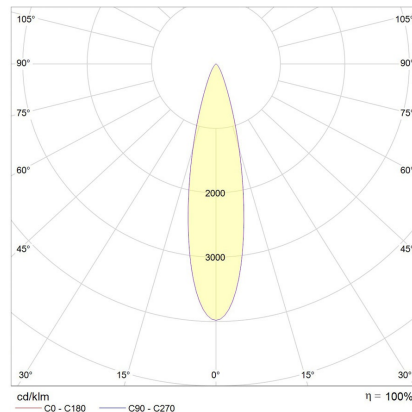

Thomas Mini 40°

