



Product Code

MO71



Technical Description

Captivating with durability...

- Outdoor uplight designed for commercial outdoor use
  - Highly efficient, robust performance
  - Exceptional IP67 and IK09 ratings with CRI90 as standard, low glare design and a 5-year warranty\*
  - 316 Stainless Steel trim with drive-over load rating of up to 2000Kg
  - Marine grade powdercoat and other finishes available on request
  - Variants include Midi and Maxi sizes and wallwasher options
  - Local stock availability
- \*Please see Warranty Terms & Conditions for further information.

Electrical Specifications

System Power	3W
Input Voltage	24V DC
Control Type	ON/OFF
System Efficacy	27lm/W

Physical Characteristics


Installation Method	Fixed Recessed
Trim Finish	316 Stainless Steel
IP Rating / IK Rating	IP67/ IK06
Accessories	Without Accessory
Weight	0.3Kgs

Photometric Info


Luminaire Lumens	80lm
Colour Rendering Index (CRI)	CRI90
Colour Temperature (CCT)	3000K
Beam Angle	16°, 24°, 40°
Lumen Maintenance (L70)	> 52, 000hrs (L70) B10
MacAdam Step	3 Step

Polar Distribution Diagrams

Verne Tiny 16°

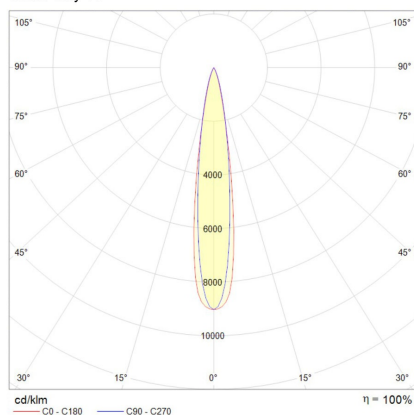

Verne Tiny 24°

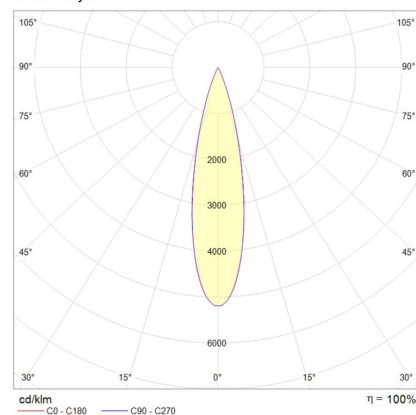

Verne Tiny 40°

