

Verne Maxi

OUTDOOR

Product Code

MO74



Technical Description

Captivating with durability...

- Outdoor uplight designed for commercial outdoor use
- Highly efficient, robust performance
- Exceptional IP67 and IK09 ratings with CRI90 as standard, low glare design and a 5-year warranty*
- 316 Stainless Steel trim with drive-over load rating of up to 2000Kg
- Marine grade powder coat available on request
- Variants include Tiny, Mini and Midi sizes and wall washer options
- Local stock availability
- If you require a customised version of this product, please [contact us](#)

*Please see Warranty Terms & Conditions for further information.

Electrical Specifications


System Power	24W
Input Voltage	240V
Control Type	ON/OFF
System Efficacy (max.)	85lm/W
Power Factor	> 0.9

Photometric Info

Luminaire Lumens	2030lm
CRI	CRI90
CCT	3000K
Beam Angle	24°, 32°, 53°
Lumen Maintenance	> 61, 200hrs (L70 B10)
MacAdam Step	3 Step


Physical Characteristics

Installation Method	Fixed Recessed
Trim Finish	316 Stainless Steel
IP Rating / IK Rating	IP67/ IK10
Weight	5.4Kgs
Fitting Material	Aluminium & 316 Stainless Steel

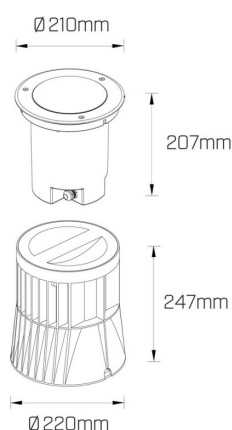


Polar Distribution Diagrams

Verne Maxi 20°

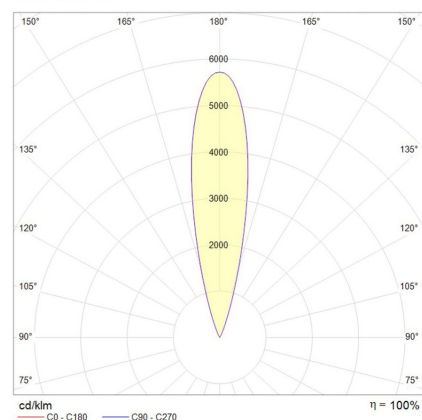

Verne Maxi 53°

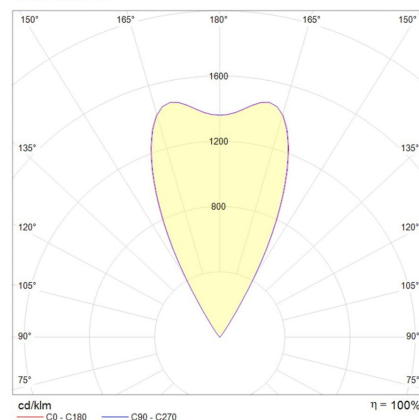

Verne Maxi 32°

